

A Revolutionary SIP Phone with a 7-inch Touch Screen

Yealink presents a dynamic business communication solution to executives and professionals with the new SIP-T48U IP phone. The phone employs an appealing large touch screen that makes the switch between pages and applications swift, easy and convenient. Integrated with Hall Switch, T48U gives you a quieter operation and environment. United Yealink Optima HD Voice technology, the T48U awards you the superb audio quality and crystal-clear voice communications. Moreover, the T48U puts dual USB ports in a phone that makes Bluetooth, Wi-Fi, USB headset and USB recording come true, and you can use any two of them freely according to your needs. The Yealink new T4U series offers the same elegant appearance as the T4 line, but with improvements for greater interoperability and better collaboration. The T4U series better builds the Yealink ecosystem and is compatible with more Yealink headsets, supporting intelligent channel switching* and using the phone to configure and upgrade headset.

*Only BH76 headset support the intelligent channel switching feature.



7-inch Touch Screen



Optima HD Voice



Dual USB Ports



Acoustic Shield



Unified Firmware



Expansion Module



Key Features and Benefits

Easy Customization and High Expansibility

The SIP-T48U has a seven-inch, 800 x 480-pixel, backlit color touch screen, which enables a rich visualization and easy navigation. Accompanied by two USB ports, the T48U is your right-hand man in the office that makes Bluetooth, Wi-Fi, USB headset and USB recording possible, and you can use any two of them freely according to your needs to enrich phone features. Meanwhile, the phone not only has 29 one-touch DSS keys that can be easily programmed to various features, but also can connect up to three expansion modules, for up to 180 additional buttons with a screen-based LCD display and LED system.

HD Audio

Yealink Optima HD Voice technology combines cutting-edge hardware and software with wideband technology for maximum acoustic performance. Being a totally open, highly versatile audio codec, is designed to perform a higher HD audio quality than other wideband codecs in a high network bandwidth. And its hearing aid compatible (HAC) handset helps the person who is with hearing loss to hear the voice more clearly.

Efficient Installation and Provisioning

Yealink T4U series supports efficient provisioning and effortless mass deployment with Yealink's Redirection and Provisioning Service (RPS) and Boot mechanism to help you realize the Zero Touch Provisioning without any complex manual settings, which makes the T4U series simple to deploy, easy to maintain and upgrade. Furthermore, a unified firmware and auto-p template that applies to all T4U phone models, saves even more time and costs for businesses, as well as simplifies the management and maintenance.

Secure Transport and Interoperability

Yealink T4U series uses SIP over Transport Layer Security (TLS/SSL), which is the latest network security technology. It's also compatible with leading soft switch suppliers, such as 3CX, Broadsoft Broadworks. It is carried with dual firmware images that gives you a enterprise-level protection to avoid bricking your system once upgrade failed. What's more, T4U series support the feature of Security Center, which allows users to decide whether to connect the phone to the device management platform/service and what private data you permit to report.

- 7" 800 x 480-pixel color touch screen with backlight
- Dual USB ports
- Dual firmware images
- T4U Auto-P template unified
- T4U firmware unified
- Up to 16 SIP accounts
- Dual-port Gigabit Ethernet
- PoE support
- Paperless label design
- Headset, EHS support
- Wi-Fi via WF40/WF50
- Bluetooth via BT40/BT41/BT52
- USB recording
- Supports color-screen expansion modules
- Stand with two adjustable angles
- Wall mountable
- Handset with hall switch

Audio Features

- > HD voice: HD handset, HD speaker
- > Hearing aid compatible (HAC) handset
- > Acoustic Shield
- > Smart Noise Filtering
- > Codecs: AMR-WB (optional), AMR-NB (optional), G.722, POMO (G.711µ), POMA (G.711A), G.726.1, G.729, G.729A, G.729B, G.729AB, G.728, ILBC
- > DTMF: In-band, Out-of-band (RFC 2836) and SIP INFO
- > Full-duplex hands-free speakerphone with AEC
- > VAD, ONG, AEC, FLO, AJS, AGC

Phone Features

- > 18 VoIP accounts
- > Call hold, mute, DND
- > One-touch speed dial, hotline
- > Call forward, call waiting, call transfer
- > Group listening
- > Emergency call
- > Redial, call return, auto answer
- > 10-way conferencing
- > Direct IP call without SIP proxy
- > Ring tone selection/import/delete
- > Set date time manually or automatically
- > Dial plan, XML Browser, action URL/URI
- > RTP-XR (RFC6811), VQ-RTPXR (RFC6066)
- > Dual USB ports (2.0 compliant)
 - Bluetooth headset through BT40/BT41/BT62
 - Support Yealink Bluetooth headset BH71/BH71 Workstation/BH71 Workstation Pro/BH72/BH76/UH39 through BT62
 - DECT wireless headset (Yealink WH82 Portable/WH86 Portable)
 - Contact synchronization through BT40/BT41/BT62
 - Simultaneous connection of one headset and one mobile phone through BT40/BT41/BT62
 - Wi-Fi through WF40/WF60
 - USB call recording through USB flash drive
 - USB headset
 - Expansion Module EXP45
 - Wireless Headset Adapter EH840
- > USB/Bluetooth connectivity to Yealink OP900/OP700 speakerphones/wireless headset UH66, USB connectivity to Yealink wired headset UH54/UH56/UH37:
 - Basic functions: Answer / end, call mute
 - Enhanced function: audio optimization, redial, call hold, volume synchronization, multiple calls control
- > Enhanced DSS key

Directory

- > Local phonebook up to 1000 entries
- > Booklist
- > XML/LDAP remote phonebook
- > Smart dialing
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded

IP-PEX Features

- > Busy Lamp Field (BLF)
- > Bridged Line Appearance (BLA)
- > Anonymous call, anonymous call rejection
- > Hot-decking, voice mail
- > Flexible seating
- > Executive and Assistant
- > Call park, call pickup
- > Centralized call recording; call recording
- > Visual voice mail

Display and Indicator

- > 7" 800 x 480-pixel color touch screen with backlight
- > 24 bit depth color
- > LED for call and message waiting indication
- > Wallpaper
- > Intuitive user interface with icons and soft keys
- > Multilingual user interface
- > Caller ID with name, number and photo
- > Screensaver
- > Power saving

Feature keys

- > 29 one-touch DSS keys
- > 7 feature keys: message, headset, hold, mute, transfer, redial, hands-free speakerphone
- > 6 navigation keys
- > Volume control keys
- > Illuminated mute key
- > Illuminated headset key
- > Illuminated hands-free speakerphone key

Interface

- > Dual-port Gigabit Ethernet
- > Power over Ethernet (IEEE 802.6af), class 6
- > 2 x USB port (2.0 compliant)
- > 1 x RJ9 (4P4O) headset port
- > 1 x RJ9 (4P4O) headset port

Other Physical Features

- > Color: Classic Grey
- > Wall mountable (optional)
- > External Yealink AG adapter (optional): AO 100-240 V Input and DO 6 V/2 A output
- > USB output current: 5 V @ 1 A
- > Power consumption (FSU): 1.8-6.8 W
- > Power consumption (PoE): 2.6-4.7 W
- > Dimension (W*D*H*): 266 x 226 x 86 x 64mm
- > Operating humidity: 5% to 90%, noncondensing
- > Operating temperature: -10 to +45°C (+14 to 113°F)
- > Storage temperature: -60 to +70°C (-72 to +168°F)

Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- > Auto-provision with PnP
- > Zero-tp-touch, TR-DSS
- > Phone lock for personal privacy protection
- > Reset to factory, reboot
- > Package tracing export, system log

Network and Security

- > SIP v1 (RFC2645), v2 (RFC6061)
- > Call server redundancy supported
- > NAT traversal: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using NTP
- > UDP/TCP/DNS-SRV(RFC 6266)
- > CoS: 802.1p/Q tagging (VLAN), Layer 8 ToS DSCP
- > RTP for voice
- > Transport Layer Security (TLS 1.0)
- > HTTPS certificate manager
- > AES encryption for configuration file (AES256)
- > Digest authentication: MD5/SHA1/SHA224/-SHA256/SHA384/SHA512
- > OpenVPN, IEEE802.1XL2TP VPN
- > IPv6
- > LLDP/ODP/DHCP VLAN
- > IDS
- > WPA2/WPA3
- > Secure boot
- > GARP (Generic Attribute Registration Protocol)


Package Features

- > Package content:
 - Yealink SIP-T48U IP phone
 - Handset with handset cord
 - Ethernet Cable (2m CAT5E UTP Cable)
 - Stand
 - Quick Start Guide
 - Power Adapter (Optional)
 - Wall Mount Bracket (Optional)
- > Qty/OTN: 6 POS
- > N.W./OTN: 7.9 kg
- > G.W./OTN: 8.4 kg
- > Gltbox size: 624 x 266 x 128 mm

Compliance



Connection

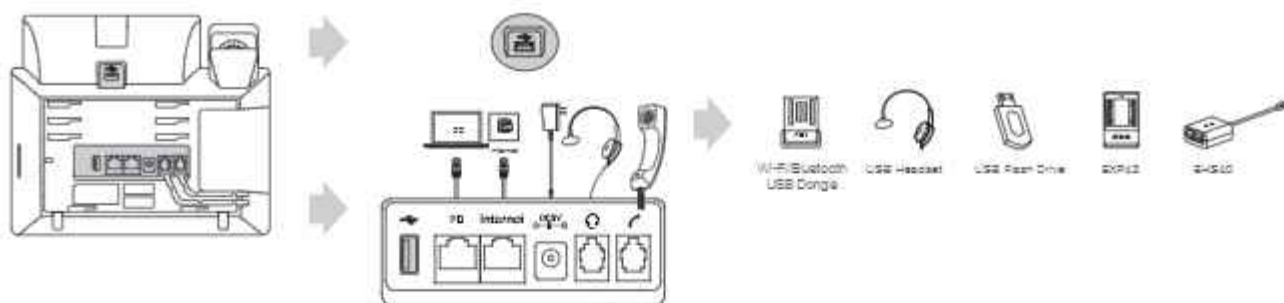

[Learn More](#)

To find out how Yealink solutions can help your organization, visit us at www.yealink.com or mail to sales@yealink.com

About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

For more information about Yealink, [click here](#).

Copyright

Copyright © 2023 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.

All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.
Web: www.yealink.com
Addr: No.1 Ling-Xia North Road, High Tech Park,
Huli District, Xiamen, Fujian, P.R.C.
Copyright©2023 Yealink Inc. All rights reserved.